

**TRANSMITTAL LETTER TO THE UNITED STATES
DESIGNATED/ELECTED OFFICE (DO/EO/US)
CONCERNING A FILING UNDER 35 U.S.C. § 371**

449122021600

U.S. APPLICATION NO. (if known, see 37 CFR 1.5)

10/070253
Not yet assigned

INTERNATIONAL APPLICATION NO.

INTERNATIONAL FILING DATE

PRIORITY DATE CLAIMED

PCT/DE00/02981

August 31, 2000

September 2, 1999

TITLE OF INVENTION

METHOD FOR MEASURING THE INTERCELL INTERFERENCE IN A FREQUENCY CHANNEL

APPLICANT(S) FOR DO/EO/US

Markus DILLINGER et al.

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☐ This is an express request to begin national examination procedures (35 U.S.C. 371(f)). The submission must include items (5), (6), (9) and (21) indicated below.
4. ☒ The US has been elected by the expiration of 19 months from the priority date (PCT Article 31).
5. ☒ A copy of the International Application as filed (35 U.S.C. 371(c)(2))
 - a. ☒ is attached hereto (required only if not communicated by the International Bureau).
 - b. ☒ has been communicated by the International Bureau
 - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☒ An English language translation of the International Application under PCT Article 19 (35 U.S.C. 371(c)(2)).
 - a. ☒ is attached hereto.
 - b. ☐ has been previously submitted under 35 U.S.C. 154(d)(4)
7. ☐ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3))
 - a. ☐ are attached hereto (required only if not communicated by the International Bureau).
 - b. ☐ have been communicated by the International Bureau
 - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
 - d. ☐ have not been made and will not be made.
8. ☐ An English language translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
9. ☒ An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).
10. ☐ An English language translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).


Items 11. to 16. below concern document(s) or information included:

11. ☒ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
12. ☒ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
13. ☒ A FIRST preliminary amendment.
14. ☐ A SECOND or SUBSEQUENT preliminary amendment
15. ☐ A substitute specification.
16. ☐ A change of power of attorney and/or address letter
17. ☐ A computer-readable form of the sequence listing in accordance with PCT Rule 13ter 2 and 35 U.S.C. 1 821 - 1.825.
18. ☐ A second copy of the published international application under 35 U.S.C. 154(d)(4)
19. ☐ A second copy of the English language translation of the international application under 35 U.S.C. 154(d)(4)
20. ☒ Other items 1) Application Data Sheet; 2) Int'l Search Report; 3) IPER; 4) Return receipt postcard.

CERTIFICATE OF HAND DELIVERY

I hereby certify that this correspondence is being hand filed with the United States Patent and Trademark Office in Washington, D.C. on March 4, 2002.

Melissa Garton
Melissa Garton

APPLICATION NO. (if known, see 37 CFR 1.53) not yet assigned	107 070253	INTERNATIONAL APPLICATION NO. PCT/DE00/02981	ATTORNEY'S DOCKET NO. 449122021600
<input checked="" type="checkbox"/> The following fees are submitted: BASIC NATIONAL FEE (37 CFR 1.492(a)(1)-(5)): Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO.....\$1,040.00 International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO.....\$890.00 International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO.....\$740.00 International preliminary examination fee (37 CFR 1.482) paid to USPTO but all claims did not satisfy provision of PCT Article 33(1)-(4).....\$710.00 International preliminary examination fee (37 CFR 1.482) paid to USPTO and all claims satisfied provisions of PCT Article 33(1)-(4).....\$100.00			CALCULATIONS PTO USE ONLY
ENTER APPROPRIATE BASIC FEE AMOUNT =			\$890.00
Surcharge of \$130.00 for furnishing the oath or declaration later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(e)).			\$0
CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE
Total claims	- 20 =		x \$18.00
Independent claims	- 3 =		x \$84.00
MULTIPLE DEPENDENT CLAIM(S) (if applicable)			+ \$280.00
TOTAL OF ABOVE CALCULATIONS =			\$890.00
Applicant claims small entity status. See 37 CFR 1.27. The fees indicated above are reduced by 1/2.			\$0
SUBTOTAL =			\$890.00
Processing fee of \$130.00 for furnishing the English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(f)).			\$0
TOTAL NATIONAL FEE =			\$890.00
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property			\$40.00
TOTAL FEES ENCLOSED =			\$930.00
			Amount to be refunded: \$
			charged: \$
<input checked="" type="checkbox"/> Please charge my Deposit Account No. 03-1952 (referencing Docket No. 449122021600) in the amount of \$930.00 to cover the above fees. A duplicate copy of this sheet is enclosed. <input checked="" type="checkbox"/> The Commissioner is hereby authorized to charge any additional fees that may be required, or credit any overpayment to Deposit Account No. 03-1952 (referencing Docket No. 449122021600).			
NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.			
SEND ALL CORRESPONDENCE TO: Kevin R. Spivak Morrison & Foerster LLP 2000 Pennsylvania Avenue, N.W. Washington, D.C. 20006-1888			
 SIGNATURE			Kevin R. Spivak Registration No. 43,148
March 4, 2002			

CERTIFICATE OF HAND DELIVERY

I hereby certify that this correspondence is being hand filed with the United States Patent and Trademark Office in Washington, D.C. on
March 4, 2002

Melissa Garon
Melissa Garon

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In the application of:

Markus DILLINGER et al.

Serial No.: Not yet assigned

Filing Date: March 4, 2002

For: METHOD FOR MEASURING THE
INTERCELL INTERFERENCE IN A
FREQUENCY CHANNEL

Examiner: Not yet assigned

Group Art Unit: Not yet assigned

PRELIMINARY AMENDMENT

BOX PCT

Commissioner for Patents
Washington, D.C. 20231

Sir:

Prior to examination on the merits, please amend this application as follows:

In the Claims:

3. (Amended) The method as claimed in claim 1, in which the transmitted powers (sks1 to sksn) are corrected by subtracting a path loss (pv) between the first base station (BS1) and the first subscriber station (MS1).

5. (Amended) The method as claimed in claim 3, in which the first subscriber station (MS1) measures a received power (epi) on a pilot channel (CCPCH) associated with the first base station (BS1), and the path loss (pv) is determined from the difference between transmitted power (spi) on the pilot channel (CCPCH) and the received power (epi).

7. (Amended) The method as claimed in claim 1, in which the measurement of the total received power (gep) and the determination of the transmitted powers (sks1 to sksn) take place at the same time.
8. The method as claimed in claim 1, in which the measurements are performed within one time interval (ts).
10. The method as claimed in claim 8, in which a pilot channel (CCPCH) is transmitted during the time interval (ts), and the measurement result for the total received power (gep) is reduced, by subtraction, by the measurement result for the received power (epi) on the pilot channel (CCPCH).
11. The method as claimed in claim 1, in which the intercell interference (II) is measured cyclically.
12. The method as claimed in claim 1, in which measurement of the intercell interference (II) is controlled by a network device (BS1,RNC).
13. The method as claimed in claim 1, in which measurement of the intercell interference (II) is controlled by the first subscriber station (MS1).
14. The method as claimed in claim 12, in which measurement is controlled if a parameter (BER) relating to the reception quality of the information falls below a threshold value.

REMARKS


The above amendments are made to remove the multiple dependency from the claims.

Attached hereto is a marked-up version of the changes made to the specification and claims by the current amendment. The attached page is captioned "Version with markings to show changes made".

In the unlikely event that the transmittal letter is separated from this document and the Patent Office determines that an extension and/or other relief is required, applicant petitions for any required relief including extensions of time and authorizes the Commissioner to charge the cost of such petitions and/or other fees due in connection with the filing of this document to Deposit Account No. 03-1952 referencing docket no. 449122021600. However, the Commissioner is not authorized to charge the cost of the issue fee to the Deposit Account.

Respectfully submitted,

Dated: March 4, 2002


Kevin R. Spivak
Registration No. 43,148

Morrison & Foerster LLP
2000 Pennsylvania Avenue, N.W.
Washington, D.C. 20006-1888
Telephone: (202) 887-6924
Facsimile: (202) 263-8396

VERSION WITH MARKINGS TO SHOW CHANGES MADE

For the convenience of the Examiner, the changes made are shown below with deleted text in strikethrough and added text in underline.

In the Claims:

3. (Amended) The method as claimed in ~~one of the preceding claims~~ claim 1, in which the transmitted powers (sks1 to sksn) are corrected by subtracting a path loss (pv) between the first base station (BS1) and the first subscriber station (MS1).
5. (Amended) The method as claimed in ~~one of claims 3 or 4~~ claim 3, in which the first subscriber station (MS1) measures a received power (epi) on a pilot channel (CCPCH) associated with the first base station (BS1), and the path loss (pv) is determined from the difference between transmitted power (spi) on the pilot channel (CCPCH) and the received power (epi).
7. (Amended) The method as claimed in ~~one of the preceding claims~~ claim 1, in which the measurement of the total received power (gep) and the determination of the transmitted powers (sks1 to sksn) take place at the same time.
8. The method as claimed in ~~one of the preceding claims~~ claim 1, in which the measurements are performed within one time interval (ts).
10. The method as claimed in ~~one of claims 8 or 9~~ claim 8, in which a pilot channel (CCPCH) is transmitted during the time interval (ts), and the measurement result for the total received power (gep) is reduced, by subtraction, by the measurement result for the received power (epi) on the pilot channel (CCPCH).
11. The method as claimed in ~~one of the preceding claims~~ claim 1, in which the intercell interference (II) is measured cyclically.

12. The method as claimed in ~~one of the preceding claims~~ claim 1, in which measurement of the intercell interference (II) is controlled by a network device (BS1,RNC).
13. The method as claimed in ~~one of claims 1 to 11~~ claim 1, in which measurement of the intercell interference (II) is controlled by the first subscriber station (MS1).
14. The method as claimed in ~~one of claims 12 or 13~~ claim 12, in which measurement is controlled if a parameter (BER) relating to the reception quality of the information falls below a threshold value.

3/prls

199902733

Foreign version

Description

Method for measuring intercell interference in a frequency channel

5

The invention relates to a method for measuring intercell interference in a frequency channel in a radio communication system.

- 10 In radio communication systems, messages (speech, image information or other data) are transmitted via transmission channels using electromagnetic waves (radio interface). The messages are transmitted both in the downlink from the base station to the subscriber station and in the uplink from the subscriber station to the base station.

- DE 198 10 285 disclosed that the signal sources are distinguished, and hence the signals are evaluated, using methods known as frequency division multiplexing (FDMA), time division multiplexing (TDMA) or code division multiplexing (CDMA), which can also be combined with one another. One form of time division multiplexing (TDMA) is the TDD (time division duplex) transmission method, in which a common frequency band is used to transmit both in the uplink, i.e. from the base station to the subscriber station, and in the downlink from the subscriber station to the base station.

30

- A signal mix, corresponding to a data assessment in CDMA systems, can be separated in a known manner by signal matched filtering (MF, Matched Filtering) which is respectively matched to the subscriber's spreading code (CDMA code). A receiver performing this signal matched filtering can be implemented, by way of example, in the form of a bank of correlators or in the form of a bank of RAKE receivers.

35

199902/33

- 2 -

In addition, a signal mix can be separated in a known manner using "Joint Detection" (JD), which is described in DE 41 21 356 C2 and DE 43 29 320 A1, for example.

- 5 An important variable for handover procedures or channel allocation methods, for example DCA - Dynamic Channel Allocation, is the intercell interference. Within a base station's radio cell, the radio interface is used to transmit information in the uplink and in
10 the downlink and this information is subject to interference from emissions from base stations and subscriber stations in other radio cells. This intercell interference can severely impair the transmission quality and can even result in the
15 connection being lost.

- Determination of the intercell interference using joint detection is known, by way of example, from DE 196 15 828 C2. When using joint detection, the
20 intracell interference is eliminated by subtracting it from the signal mix received, which means that the intercell interference can be isolated from the signal mix for the purposes of improved detection. However, the use of joint detection is complex, particularly for
25 the subscriber station.

- The invention is based on the object of specifying a method for measuring intercell interference in a frequency channel in a radio communication system which
30 does not require joint detection. This object is achieved by the method having the features of patent claim 1. Advantageous developments of the invention can be found in the subclaims.

- 35 The inventive method for measuring intercell interference in a frequency channel in a radio communication system involves transmitting information

199902733

- 13 -

simultaneously to a plurality of subscriber stations in the frequency channel. The information is separated using spreading codes. Such a radio communication system is known as a CDMA system, for example.

- 5 Orthogonal spreading codes in a CDMA system can be separated better than nonorthogonal spreading codes. The frequency channel in a CDMA system has an appropriately broad bandwidth for spreading. Despite the use of separation methods, for example a spatial
- 10 separation method SDMA (Space Division Multiple Access), transmissions from base stations and subscriber stations in other radio cells transmitting in the same frequency channel can be subject to interference. This interference is called intercell
- 15 interference.

- A first subscriber station measures a total received power in the frequency channel. The total received power can advantageously be determined directly from
- 20 the RF received signal. For the same frequency channel, a sum of the transmitted powers for the spreading codes used by a first base station is determined. To this end, by way of example, either the RF transmitted signal from the base station is measured, or the sum of
- 25 the transmitted power for the individual spreading codes used is calculated from prescribed control parameters for regulating transmitted power.

- The intercell interference for the first base station's
- 30 radio cell is determined from a difference between the total received power and the sum of the transmitted powers. The intercell interference can thus be ascertained particularly easily and inexpensively. Measurement of the intercell interference for a
- 35 plurality of frequency channels is used to ascertain the frequency channel having the least intercell interference, for example for intracell handover.

199902/33

- 14 -

In one advantageous development of the invention, the first subscriber station signals a measurement result for the total received power to a network device.

- 5 Signaling the measurement result makes the total received power available, in principle, to all network devices if appropriate protocols are used to ensure signaling within the network.
- 10 In one particularly advantageous development of the invention, the transmitted powers are corrected by subtracting a path loss between the first base station and the first subscriber station. In this way, the intercell interference ascertained for a plurality of
- 15 subscriber stations becomes comparable, and the change in the intercell interference on the basis of the change in the path loss for a moving subscriber station is calculated and the result made more precise. The path loss is calculated from the difference between
- 20 transmitted power and received power on a pilot channel. The received power is measured by the subscriber station. Appropriate signaling is used to make the received power and/or the path loss available likewise to at least one network device.
- 25 It is advantageous for the measurement of the total received power and the determination of the transmitted powers to take place simultaneously, so that the transmission conditions, which are variable over time,
- 30 do not corrupt the measurement result unnecessarily. It is useful if the powers are determined within one time interval or time slot and the intercell interference is ascertained.
- 35 Advantageously, the intercell interference is measured within one time interval. The time interval is either prescribed - for example by the network operator - or is stipulated temporarily by a network device for

199902/33

- 15 -

allocating radio resources, the base station or the subscriber station. Short time intervals limit the measurement complexity.

- 5 If, by contrast, the intercell interference is measured over a long time interval, where is the measurement made more precise and resources for signaling the measurement results are saved.
- 10 Particularly advantageously, the time interval is at least part of a time slot in a TDMA system. If the time interval is appropriately short, various frequency channels are measured within the period of one time slot, which provides a very large number of measurement
- 15 results relating to a plurality of frequency channels within a very short time. This is particularly advantageous for initial access by a subscriber station, since a connection needs to be set up as quickly as possible and, in accordance with the
- 20 invention, it is necessary to ascertain measurement results for transmission channels with the best possible transmission quality within a short time span.

- If, by contrast, a connection has already been set up,
- 25 the intercell interference is advantageously measured over a plurality of time slots. Thus, by way of example, the intercell interference is measured in the first time slot of a frame in six successive frames.

- 30 If the total received power is measured and a pilot channel is transmitted in the same time interval or time slot, then the measurement result for the intercell interference is corrupted by the pilot channel's received power. Advantageously, the
- 35 measurement result for the total received power is reduced, and hence corrected, by subtraction, by the measurement result for the received power on the pilot channel. This presupposes that the subscriber station

199902/33

- 16 -

is able to measure the pilot channel's received power separately from all other received signals.

The invention is explained in more detail below using
5 exemplary embodiments with reference to drawings,
in which

FIGURE 1 shows a block diagram of a radio
communication system, in particular of a
10 mobile radio system,

FIGURE 2 shows a schematic illustration of the radio
interface between base stations and
subscriber stations, and
15

FIGURE 3 shows a schematic illustration of the
sequence of the inventive method.

The radio communication system shown in FIGURE 1, and,
20 by way of example, in the form of a mobile radio system
comprises a multiplicity of mobile switching centers
MSC which are networked among one another and set up
access to a landline network PSTN. In addition, these
mobile switching centers MSC are connected to at least
25 one respective device for allocating radio resources
RNC. Each of these devices RNC in turn allows a
connection to at least one base station BS1 or BS2.

This base station BS1 is a radio station which can use
30 a radio interface to set up and signal communication
links to mobile or fixed subscriber stations MS1, MS2
and MS3 within a radio cell FZ1. The functionality of
this structure is used by the inventive method. Use in
a wireless subscriber access system (Access Network),
35 for example, is likewise possible in this context.

In the exemplary embodiment, the base station BS1 has
set up a plurality of communication links to the

199902/33

- 17 -

subscriber stations MS1, MS2 and MS3 in a frequency channel FK. To separate the information to be transmitted, each subscriber station MS1 to MS3 uses an individual spreading code sk1, sk2 and sk3.

5

Another base station BS2, which covers an adjacent radio cell FZ2, for example, has set up a communication link to the subscriber station MS1. For the communication link, the frequency channel FK with the spreading code sk1 is likewise used for transmission. Since the second base station BS2 radiates omnidirectionally in the frequency channel FK in the exemplary embodiment, the information sent by the second base station BS2 in the frequency channel FK impairs the transmission between the first base station BS1 and the first subscriber station MS1, in the form of intercell interference II. The information sent by the subscriber station MS1 can also disturb the transmission in the frequency channel of the adjacent radio cell FZ1.

The exemplary embodiment in FIGURE 1 can be regarded as the "worst case", since the same spreading code sk1 on a radio channel FK is normally reused only over great geographical distances, and two adjacent radio cells FZ1 and FZ2, in which the antennas A of the base station BS1 and BS2 radiate omnidirectionally, do not use the same spreading code sk1. Another opportunity for reducing the intercell interference II is to use directionally selective antennas. If the antenna A used in the exemplary embodiment transmits only in the direction of the subscriber station MS1, the intercell interference II is reduced further.

An exemplary frame structure for the radio interface in a TDD transmission method can be seen in FIGURE 2. On the basis of a TDMA component, provision is made for a broadband frequency channel FK, for example having the

199902/33

- 18 -

- bandwidth 5 MHz, to be split into a plurality of time slots ts , for example 15 time slots ts_0 to ts_{14} . A transmission channel UK within the frequency channel FK is defined by a time slot ts and a spreading code sk .
- 5 Within a broadband frequency channel FK, the successive time slots ts are structured on the basis of a frame structure. Thus, 15 time slots ts_0 to ts_{14} are combined into one frame.
- 10 When using a TDD transmission method, some of the time slots ts_0 to ts_7 are used in the uplink, and some of the time slots ts_8 to ts_{14} are used in the downlink, with transmission in the uplink taking place before transmission in the downlink, for example. In between,
- 15 there is a switching instant SP which is positioned flexibly on the basis of the respective need for transmission channels UK for the uplink and the downlink. The other transmission channels UK are structured in the same way.
- 20 Within the time slots ts in a frequency channel FK, information for a plurality of connections is transmitted in radio blocks. These radio blocks comprise sections containing data d , in which sections
- 25 containing training sequences $tseq_1$ to $tseq_n$ known at the reception end are respectively embedded. The data d are spread on a connection-specific basis using a fine structure, a spreading code sk (CDMA code), so that, by way of example, n connections can be separated by this
- 30 CDMA component at the reception end. The combination of a frequency channel FK, a time slot ts and a spreading code sk defines a transmission channel UK or a signaling channel, which are used for transmitting useful information and signaling information,
- 35 respectively.

Channel pooling is used to assign one or more transmission channels UK to a communication link in

199902/33

- 19 -

each case. The channel pooling method is advantageously used to produce communication links to and from subscriber stations MS1, MS2 or MS3 using different data rates or to operate a plurality of services in parallel on one communication link. To this end, a plurality of transmission channels UK are combined for transmission for one connection.

The result of spreading individual symbols of the data d using Q chips is that Q subsections of duration t_{chip} are transmitted within the symbol period t_{sym} . In this context, the Q chips form the individual spreading code s_k . In addition, a guard time g_p for compensating for different signal delay times on the connections in successive time slots t_s is provided within the time slot t_s .

The result of separating the information to be transmitted using time slots t_s is that the intercell interference II can vary greatly from time slot t_s to time slot t_s . If the base stations BS1, BS2 are synchronized with one another, so that the time slots t_{s0} to t_{s14} for the base stations BS1 and BS2 are transmitted synchronously, the subscriber station MS1 measures the total received power g_{ep} (see FIGURE 3) in at least one time slot t_s for transmission in the downlink, in order to determine the intercell interference II specific to the time slot.

FIGURE 3 shows, by way of example, a sequence for the inventive method in a TD-CDMA radio communication system. It shows method steps within a subscriber station MS1 and network devices RNC, BS1, and also the signaling and information transmission operations for determining intercell interference II.

In step 1, the network device for allocating radio resources RNC transmits a request to the base station

199902/33

- 20 -

BS1 to measure the intercell interference II for the subscriber station MS1. The reason for the request is, by way of example, that measurement is necessary in order to update a list for dynamic channel allocation DCA. An alternative reason for the request is that a parameter BER for the reception quality of the information received by the subscriber station MS1 has fallen below a threshold value. The parameter BER is, by way of example, a bit error probability transmitted with signaling information from the subscriber station MS1 to the network device for allocating radio resources RNC.

Alternatively (not shown in the exemplary embodiment in FIGURE 3), the request for measurement is made by the subscriber station MS1. If the parameter BER falls below a threshold value, the subscriber station MS1 measures the total received power g_{ep} in at least one time slot t_s and signals the measurement results to a network device for allocating radio resources RNC. If the parameter BER falls below a further threshold value, then the network device for allocating radio resources RNC initiates intracell handover for the subscriber station MS1 for one of the previously measured time slots t_s . The further threshold value is advantageously stipulated by the network device for allocating radio resources RNC. It is also conceivable for intracell handover to be requested by the subscriber station MS1.

30

In step 2 of the exemplary embodiment, the base station BS1 transmits a control signal STS in a signaling channel and general signaling information in a pilot channel CCPCCH to the subscriber station MS1. The control signal STS is used by the base station BS1 to control measurement of the intercell interference II. The base station BS1 prescribes the time slot t_s to be measured, for example, for the

35

PATENT
Docket No. 449122021600

CERTIFICATE OF HAND DELIVERY

I hereby certify that this correspondence is being hand filed with the United States Patent and Trademark Office in Washington,
D.C. on March 4, 2002



Melissa Carton

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In the application of:

Markus DILLINGER et al.

Serial No.: Not yet assigned

Filing Date: March 4, 2002

For: METHOD FOR MEASURING THE
INTERCELL INTERFERENCE IN A
FREQUENCY CHANNEL

Examiner: Not yet assigned

Group Art Unit: Not yet assigned

INFORMATION DISCLOSURE
STATEMENT UNDER 37 CFR 1.97Commissioner for Patents
Washington, D.C. 20231

Sir:

Pursuant to 37 CFR 1.97 and 1.98, Applicant submits for consideration in the above-identified application the documents listed on the attached Form PTO-1449. Copies of the documents are also submitted herewith. The Examiner is requested to make these documents of record.

This Information Disclosure Statement is submitted:

- ☒ With the application; accordingly, no fee or separate requirements are required.


Applicant would appreciate the Examiner initialing and returning the Form PTO-1449, indicating that the information has been considered and made of record herein.

The information contained in this Information Disclosure Statement under 37 CFR 1.97 is to the best of my knowledge and is not to be construed as a representation that: (i) a complete search has been made; (ii) additional information material to the examination of this application does not exist; (iii) the information, protocols, results and the like reported by third parties are accurate or enabling; or (iv) the above information constitutes prior art to the subject invention.

In the event that the transmittal letter is separated from this document and the Patent Office determines that an extension and/or other relief is required, Applicant petitions for any required relief including extensions of time and authorizes the Commissioner to charge the cost of such petitions and/or other fees due in connection with the filing of this document to **Deposit Account No. 03-1952** referencing **449122021600**. However, the Commissioner is not authorized to charge the cost of the issue fee to the Deposit Account.

Dated: March 4, 2002

Respectfully submitted,

By: 
Kevin R. Spivak
Registration No. 43,148

Morrison & Foerster LLP
2000 Pennsylvania Avenue, N.W.
Washington, D.C. 20006-1888
Telephone: (202) 887-6924
Facsimile: (202) 263-8396

199902/33

- 21 -

subscriber station MS1.

- In step 3, a sum of transmitted powers $sks1$ to $sksn$ for the spreading codes sk used by the base station BS1 is determined in the time slot ts to be measured. For the pilot channel CCPCH, the base station BS1 ascertains a transmitted power spl . A transmitted power regulator is used to regulate the transmitted power on a transmission channel from the base station BS1 to the subscriber station MS1. From associated regulation parameters, it is possible for a processor (CPU) to determine the transmitted powers $sks1$ to $sksn$ and to buffer-store them in a memory until the intercell interference II is determined. The transmitted power spl on the pilot channel CCPCH is ascertained in a similar manner, with the transmitted power spl on the pilot channel CCPCH being able to be assumed to be constant over a longer period of time.
- In step 4, the total reception line gep for the time slot ts to be measured is measured simultaneously with step 3. The received power epi on the pilot channel CCPCH is also measured simultaneously with the ascertainment of the transmitted power spl on the pilot channel CCPCH. For the measurements, an analog/digital converter is advantageously used which allows the measurement results to be evaluated further using a processor (CPU). The measurement results and evaluation results are stored in a memory in order to produce an average for a plurality of measurements taken at different times or to perform statistical evaluations. The measurement results for the total received power gep and the received power epi on the pilot channel CCPCH are transmitted to the base station BS1 in step 5 in appropriate signaling information.

Steps 2 to 5 are, by way of example, repeated cyclically for at least one time slot ts , and the

199902/33

- 22 -

results are averaged in order to calculate the variations in the results over a particular period of time, for example 1 second.

- 5 In step 6, the base station BS1 determines a path loss p_v from the difference between transmitted power s_{pi} and received power e_{pi} on the pilot channel CCPCH. The intercell interference II for the measured time slot t_s is calculated on the basis of the formula

10

$$II = g_{ep} - \sum_{x=1}^n (s_{kx} - p_v)$$

- with all variables in dB. From the total received power g_{ep} , the sum of the transmitted powers s_{k1} to s_{kn} for the spreading codes s_k used by the base station BS1 is subtracted in order to obtain the intercell interference II. In one advantageous development of the invention, the intercell interference II together with the spreading codes s_k for the time slot t_s is evaluated and is temporarily stored, since the intercell interference II varies with the change in the spreading codes s_k used in the list for dynamic channel allocation DCA.

- 25 To obtain results comparable to the measurements for other subscriber stations MS2, MS3, MS1, the transmitted power s_{kx} for the respective spreading code s_k is respectively reduced by the path loss p_v . This normalization is also used to compare the base station BS1, BS2 with one another in order to obtain results relating to the interference, the utilization levels and radio traffic density in the individual radio cells FZ1, FZ2.

- 35 In step 7, the intercell interference II determined previously is signaled to the network device for allocating radio resources RNC. The network device for

199902/33

- 23 -

allocating radio resources RNC uses the intercell interference II as an input variable for dynamic channel allocation DCA, for example. Alternatively, (not shown in FIGURE 3), the intercell interference II is calculated in the network device for allocating the radio resources RNC using the formula cited above. To this end, the transmitted powers sk_{s1} to sk_{sn} , the path loss p_v and the total received power ge_p are signaled to the network device for allocating radio resources RNC by the base station BS1.

Alternatively (not shown in FIGURE 3), measurement of the intercell interference II is initiated by the subscriber station MS1 by means of access. Random multiple access sent by the subscriber station MS1 in a signaling channel (RACH - Random Access Channel) is received and evaluated by the base station BS1. At the same time as the evaluation, the total received power ge_p and the received power ep_i on the pilot channel CCPCH are measured by the subscriber station MS1, and the transmitted powers sk_{s1} to sk_{sn} and also sp_i for one or more time slots ts are determined by the base station BS1. The intercell interference measured is subsequently valid as a decision criterion for channel allocation.

199902733

- 24 -

Patent claims

1. A method for measuring intercell interference (II) in a frequency channel (FK) in a radio communication system, in which information separated using spreading codes (sk) is transmitted simultaneously to a plurality of subscriber stations (MS1, MS2, MS3) in the frequency channel (FK), a total received power (gep) is measured in the frequency channel (FK) by a first subscriber station (MS1), a sum of transmitted powers (sksl to sksn) for the spreading codes (sk) used by a first base station (BS1) is determined in the frequency channel (FK), and the intercell interference (II) is determined from a difference between the total received power (gep) and the sum of the transmitted powers (sksl to sksn).
2. The method as claimed in claim 1, in which a measurement result for the total received power (gep) is signalled to a network device (BS1, RNC), and the intercell interference (II) is determined in the network device (BS1, RNC).
3. The method as claimed in one of the preceding claims, in which the transmitted powers (sksl to sksn) are corrected by subtracting a path loss (pv) between the first base station (BS1) and the first subscriber station (MS1).
4. The method as claimed in claim 3, in which the path loss (PV) is signaled to a network device (RNC).

5. The method as claimed in one of claims 3 or 4, in which the first subscriber station (MS1) measures a received power (epi) on a pilot channel (CCPCH) associated with the first base station (BS1), and the path loss (pv) is determined from the difference between transmitted power (spi) on the pilot channel (CCPCH) and the received power (epi).

6. The method as claimed in claim 5, in which the measurement result for the received power (epi) is signaled to a network device (BS1,RNC).

7. The method as claimed in one of the preceding claims, in which the measurement of the total received power (gep) and the determination of the transmitted powers (sksl to sksn) take place at the same time.

8. The method as claimed in one of the preceding claims, in which the measurements are performed within one time interval (ts).

9. The method as claimed in claim 8, in which the time interval (ts) is at least part of a time slot (ts) in a TDMA system.

10. The method as claimed in one of claims 8 or 9, in which a pilot channel (CCPCH) is transmitted during the time interval (ts), and the measurement result for the total received power (gep) is reduced, by subtraction, by the measurement result for the received power (epi) on the pilot channel (CCPCH).

199902/33

- 26 -

11. The method as claimed in one of the preceding claims, in which the intercell interference (II) is measured cyclically.

12. The method as claimed in one of the preceding claims, in which measurement of the intercell interference (II) is controlled by a network device (BS1,RNC).

13. The method as claimed in one of claims 1 to 11, in which measurement of the intercell interference (II) is controlled by the first subscriber station (MS1).

14. The method as claimed in one of claims 12 or 13, in which measurement is controlled if a parameter (BER) relating to the reception quality of the information falls below a threshold value.

199902733

- 27 -

Abstract

Method for measuring intercell interference in a frequency channel

The method for measuring intercell interference in a frequency channel in a radio communication system involves information separated using spreading codes being transmitted simultaneously to a plurality of subscriber stations in the frequency channel. A total received power is measured in the frequency channel by a first subscriber station. A sum of transmitted powers for the spreading codes used by a first base station is determined in the frequency channel. The intercell interference is determined from a difference between the total received power and the sum of the transmitted powers.

Figure 3

FIG 1

1/3

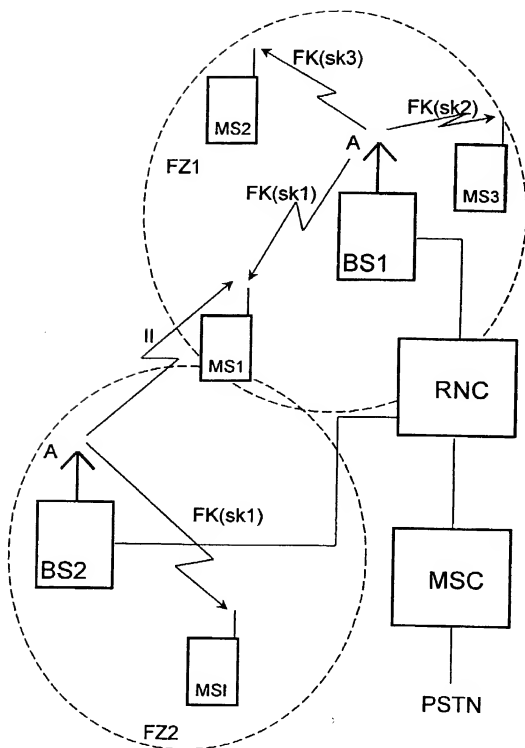


FIG 2

2/3


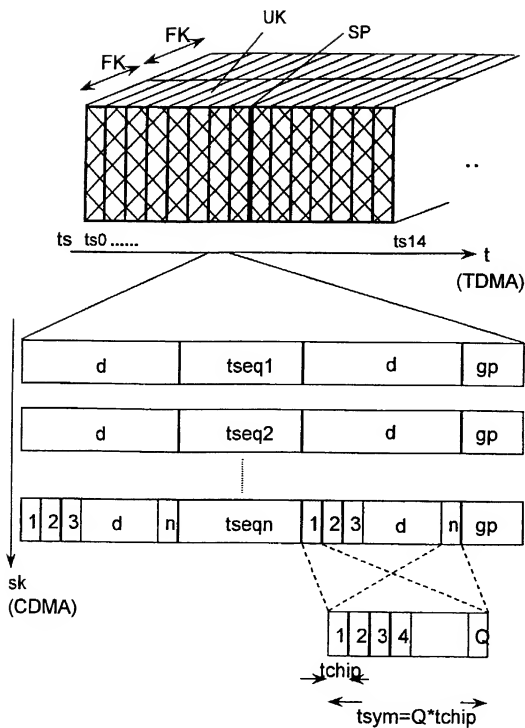


FIG 3

3/3

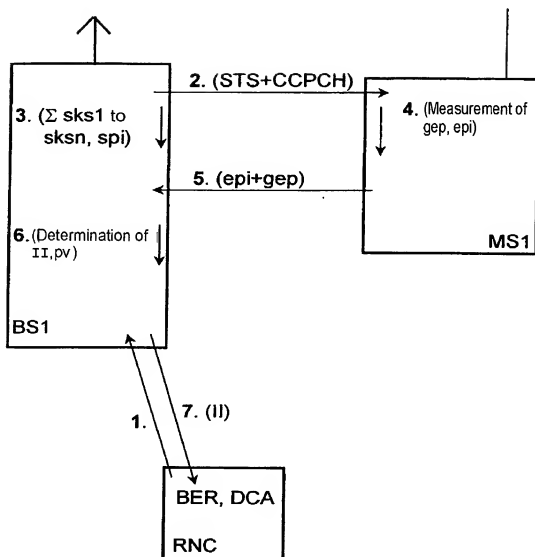

Declaration and Power of Attorney For Patent Application

Erklärung Für Patentanmeldungen Mit Vollmacht

German Language Declaration

Als nachstehend benannter Erfinder erkläre ich hiermit an Eides Statt:

As a below named inventor, I hereby declare that:

dass mein Wohnsitz, meine Postanschrift, und meine Staatsangehörigkeit den im Nachstehenden nach meinem Namen aufgeführten Angaben entsprechen,

My residence, post office address and citizenship are as stated below next to my name,

dass ich, nach bestem Wissen der ursprüngliche, erste und alleinige Erfinder (falls nachstehend nur ein Name angegeben ist) oder ein ursprünglicher, erster und Miterfinder (falls nachstehend mehrere Namen aufgeführt sind) des Gegenstandes bin, für den dieser Antrag gestellt wird und für den ein Patent beantragt wird für die Erfindung mit dem Titel:

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

Verfahren zur Messung von Interzell-
interferenz in einem Frequenzkanal

Method for measuring the intercell
interference in a frequency channel

deren Beschreibung

the specification of which

(zutreffendes ankreuzen)

(check one)

☐ hier beigefügt ist.

☐ is attached hereto.

☒ am 31.08.2000 als

☒ was filed on 31.08.2000 as

PCT internationale Anmeldung

PCT international application

PCT Anmeldungsnummer PCT/DE00/02981

PCT Application No. PCT/DE00/02981

eingereicht wurde und am

and was amended on _____
(if applicable)

abgeändert wurde (falls tatsächlich abgeändert).

Ich bestätige hiermit, dass ich den Inhalt der obigen Patentanmeldung einschliesslich der Ansprüche durchgesehen und verstanden habe, die eventuell durch einen Zusatzantrag wie oben erwähnt abgeändert wurde.

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims as amended by any amendment referred to above.

Ich erkenne meine Pflicht zur Offenbarung irgendwelcher Informationen, die für die Prüfung der vorliegenden Anmeldung in Einklang mit Absatz 37, Bundesgesetzbuch, Paragraph 1.56(a) von Wichtigkeit sind, an.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, §1.56(a).

Ich beanspruche hiermit ausländische Prioritätsvorteile gemäss Abschnitt 35 der Zivilprozessordnung der Vereinigten Staaten, Paragraph 119 aller unten angegebenen Auslandsanmeldungen für ein Patent oder eine Erfindersurkunde, und habe auch alle Auslandsanmeldungen für ein Patent oder eine Erfindersurkunde nachstehend gekennzeichnet, die ein Anmeldedatum haben, das vor dem Anmeldedatum der Anmeldung liegt, für die Priorität beansprucht wird.

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed.

German Language Declaration

Prior foreign applications
Priorität beansprucht

Priority Claimed

19941846.2

DE

02.09.1999

☒

☐

(Number)
(Nummer)

(Country)
(Land)

(Day Month Year Filed)
(Tag Monat Jahr eingereicht)

Yes
Ja

No
Nein

(Number)
(Nummer)

(Country)
(Land)

(Day Month Year Filed)
(Tag Monat Jahr eingereicht)

☐
Yes
Ja

☐
No
Nein

(Number)
(Nummer)

(Country)
(Land)

(Day Month Year Filed)
(Tag Monat Jahr eingereicht)

☐
Yes
Ja

☐
No
Nein

Ich beanspruche hiermit gemäss Absatz 35 der Zivilprozessordnung der Vereinigten Staaten, Paragraph 120, den Vorzug aller unten aufgeführten Anmeldungen und falls der Gegenstand aus jedem Anspruch dieser Anmeldung nicht in einer früheren amerikanischen Patentanmeldung laut dem ersten Paragraphen des Absatzes 35 der Zivilprozessordnung der Vereinigten Staaten, Paragraph 122 offenbart ist, erkenne ich gemäss Absatz 37, Bundesgesetzbuch, Paragraph 1.56(a) meine Pflicht zur Offenbarung von Informationen an, die zwischen dem Anmeldedatum der früheren Anmeldung und dem nationalen oder PCT internationalen Anmeldedatum dieser Anmeldung bekannt geworden sind.

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §122, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, §1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application.

PCT/DE00/02981

(Application Serial No.)
(Anmeldeseriennummer)

31.08.2000

(Filing Date D, M, Y)
(Anmeldedatum T, M, J)

anhängig

(Status)
(patentiert, anhängig,
aufgegeben)

pending

(Status)
(patented, pending,
abandoned)

(Application Serial No.)
(Anmeldeseriennummer)

(Filing Date D,M,Y)
(Anmeldedatum T, M, J)

(Status)
(patentiert, anhängig,
aufgeben)

(Status)
(patented, pending,
abandoned)

Ich erkläre hiermit, dass alle von mir in der vorliegenden Erklärung gemachten Angaben nach meinem besten Wissen und Gewissen der vollen Wahrheit entsprechen, und dass ich diese eidesstattliche Erklärung in Kenntnis dessen abgebe, dass wissentlich und vorsätzlich falsche Angaben gemäss Paragraph 1001, Absatz 18 der Zivilprozessordnung der Vereinigten Staaten von Amerika mit Geldstrafe belegt und/oder Gefängnis bestraft werden können, und dass derartig wissentlich und vorsätzlich falsche Angaben die Gültigkeit der vorliegenden Patentanmeldung oder eines darauf erteilten Patentbeschlusses gefährden können.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true, and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

German Language Declaration

VERTRETUNGSVOLLMACHT: Als benannter Erfinder beauftrage ich hiermit den nachstehend benannten Patentanwalt (oder die nachstehend benannten Patentanwälte) und/oder Patent-Agenten mit der Verfolgung der vorliegenden Patentanmeldung sowie mit der Abwicklung aller damit verbundenen Geschäfte vor dem Patent- und Warenzeichenamt: (Name und Registrationsnummer anführen)

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith (list name and registration number)

Customer No 25227

And I hereby appoint

Telefongespräche bitte richten an:
(Name und Telefonnummer)

Direct Telephone Calls to: (name and telephone number)

Ext. _____

Postanschrift:

Send Correspondence to:

Morrison and Foerster LLP
2000 Pennsylvania Ave., NW 20006-1888 Washington, DC
Telephone: (001) 202 887 1500 and Facsimile (001) 202 887 0763

or
Customer No. 25227

Voller Name des einzigen oder ursprünglichen Erfinders:

MARKUS DILLINGER

Full name of sole or first inventor:

MARKUS DILLINGER

Unterschrift des Erfinders

Datum

Inventor's signature

Date

Wohnsitz

MUENCHEN, DEUTSCHLAND (DE)

Residence

MUENCHEN, GERMANY

Staatsangehörigkeit

DE

Citizenship

DE

Postanschrift

UNTERHACHINGER STR. 89

Post Office Address

UNTERHACHINGER STR. 89

81737 MUENCHEN

81737 MUENCHEN

Voller Name des zweiten Mitfinders (falls zutreffend):

Dr. JOERN KRAUSE

Full name of second joint inventor, if any:

Dr. JOERN KRAUSE

Unterschrift des Erfinders

Datum

Second Inventor's signature

Date

Wohnsitz

BERLIN, DEUTSCHLAND (DE)

Residence

BERLIN, GERMANY

Staatsangehörigkeit

DE

Citizenship

DE

Postanschrift

FREIBERGSTR. 28-30

Post Office Address

FREIBERGSTR. 28-30

12107 BERLIN

12107 BERLIN

(Bitte entsprechende Informationen und Unterschriften im Falle von dritten und weiteren Mitfindern angeben).

(Supply similar information and signature for third and subsequent joint inventors).

Voller Name des dritten Miterfinders: Dr. STEFAN OESTREICH		Full name of third joint inventor: Dr. STEFAN OESTREICH	
Unterschrift des Erfinders <i>[Signature]</i>	Datum 25.01.02	Inventor's signature <i>[Signature]</i>	Date 25.01.02
Wohnsitz HOLZKIRCHEN, DEUTSCHLAND <i>DE</i>		Residence HOLZKIRCHEN, GERMANY	
Staatsangehörigkeit DE		Citizenship DE	
Postanschrift AUSTRASSE 18 83607 HOLZKIRCHEN		Post Office Address AUSTRASSE 18 83607 HOLZKIRCHEN	
Voller Name des vierten Miterfinders: JEAN-MICHEL TRAYNARD		Full name of fourth joint inventor: JEAN-MICHEL TRAYNARD	
Unterschrift des Erfinders <i>[Signature]</i>	Datum 25.01.02	Inventor's signature <i>[Signature]</i>	Date 25.01.02
Wohnsitz MUENCHEN, DEUTSCHLAND <i>DE</i>		Residence MUENCHEN, GERMANY	
Staatsangehörigkeit FR		Citizenship FR	
Postanschrift SPICHERENSTR. 14 81667 MUENCHEN		Post Office Address SPICHERENSTR. 14 81667 MUENCHEN	
Voller Name des fünften Miterfinders: Dr. BERNHARD WEGMANN		Full name of fifth joint inventor: Dr. BERNHARD WEGMANN	
Unterschrift des Erfinders <i>[Signature]</i>	Datum 25.01.02	Inventor's signature <i>[Signature]</i>	Date 25.01.02
Wohnsitz HOLZKIRCHEN, DEUTSCHLAND <i>DE</i>		Residence HOLZKIRCHEN, GERMANY	
Staatsangehörigkeit DE		Citizenship DE	
Postanschrift WALLBERGSTR. 15 83607 HOLZKIRCHEN		Post Office Address WALLBERGSTR. 15 83607 HOLZKIRCHEN	
Voller Name des sechsten Miterfinders: _____		Full name of sixth joint inventor: _____	
Unterschrift des Erfinders _____	Datum _____	Inventor's signature _____	Date _____
Wohnsitz _____		Residence _____	
Staatsangehörigkeit _____		Citizenship _____	
Postanschrift _____		Post Office Address _____	

(Bitte entsprechende Informationen und Unterschriften im Falle von dritten und weiteren Miterfindern angeben).

(Supply similar information and signature for third and subsequent joint inventors).